

SCHEDULE OF LANDS AND INTERESTS REQUIRED




PARCEL NUMBER	OWNER	INTEREST REQUIRED	LHE ACRES		NEW R/W REQUIRED	EXISTING R/W	TOTAL R/W REQUIRED	TOTAL ACRES
			PERM.	TEMP.				
1	RAYMOND W. WEHREBERG	TEMP LHE	—	0.29	—	0.40	0.40	222
2	HAROLD SCHMITZ	FEE	—	0.80	0.09	0.35	0.44	160

R/W PROJECT NUMBER 7271-04-21	SHEET NUMBER	TOTAL SHEETS
FEDERAL PROJECT NUMBER		
PLAT OF RIGHT OF WAY REQUIRED FOR GILLS COULEE ROAD (MIDDLE BRIDGE)		
TOWN OF HAMILTON		LA CROSSE COUNTY
SCALE 0 25' 50' 100'		
CONSTRUCTION PROJECT NUMBER		

Conventional Signs and Abbreviations


- | | | | | |
|--|--------|--------------------------|------|-------------------------|
| --- SECTION LINE | AC | ACRES | N | NORTH |
| --- QUARTER LINE | ETUX | AND WIFE | PC | POINT OF CURVATURE |
| --- TOWNSHIP AND RANGE LINE | Δ | CENTRAL ANGLE | P.I. | POINT OF INTERSECTION |
| --- PROPOSED OR NEW CENTERLINE | COR. | CORNER | P.T. | POINT OF TANGENCY |
| --- PROPOSED OR NEW R/W LINE | C.T.H. | COUNTY TRUNK HIGHWAY | R | RADIUS |
| --- EXISTING R/W LINE | D | DEGREE OF CURVE | R/W | RIGHT OF WAY |
| --- PROPERTY LINE | E | EAST | SEC. | SECTION |
| --- SLOPE INTERCEPTS | L | LENGTH OF CURVE | S | SOUTH |
| --- LIMITED HIGHWAY EASEMENT | L.H.E. | LIMITED HIGHWAY EASEMENT | STA | STATION |
| --- R/W POINT | LC | LONG CHORD | T | TOWN |
| --- FENCE | LCB | LONG CHORD BEARING | T | TANGENT LENGTH OF CURVE |
| --- SECTION OR QUARTER CORNER | MI | MILE | W | WEST |
| --- TELE. AND POWER POLE | R. | RANGE | | |
| --- TELE. PEDESTAL & UNDERGROUND CABLE | | | | |

* ACQUIRED IN THE NAME OF TOWN OF HAMILTON, SUBJECT TO EASEMENTS OF RECORD.

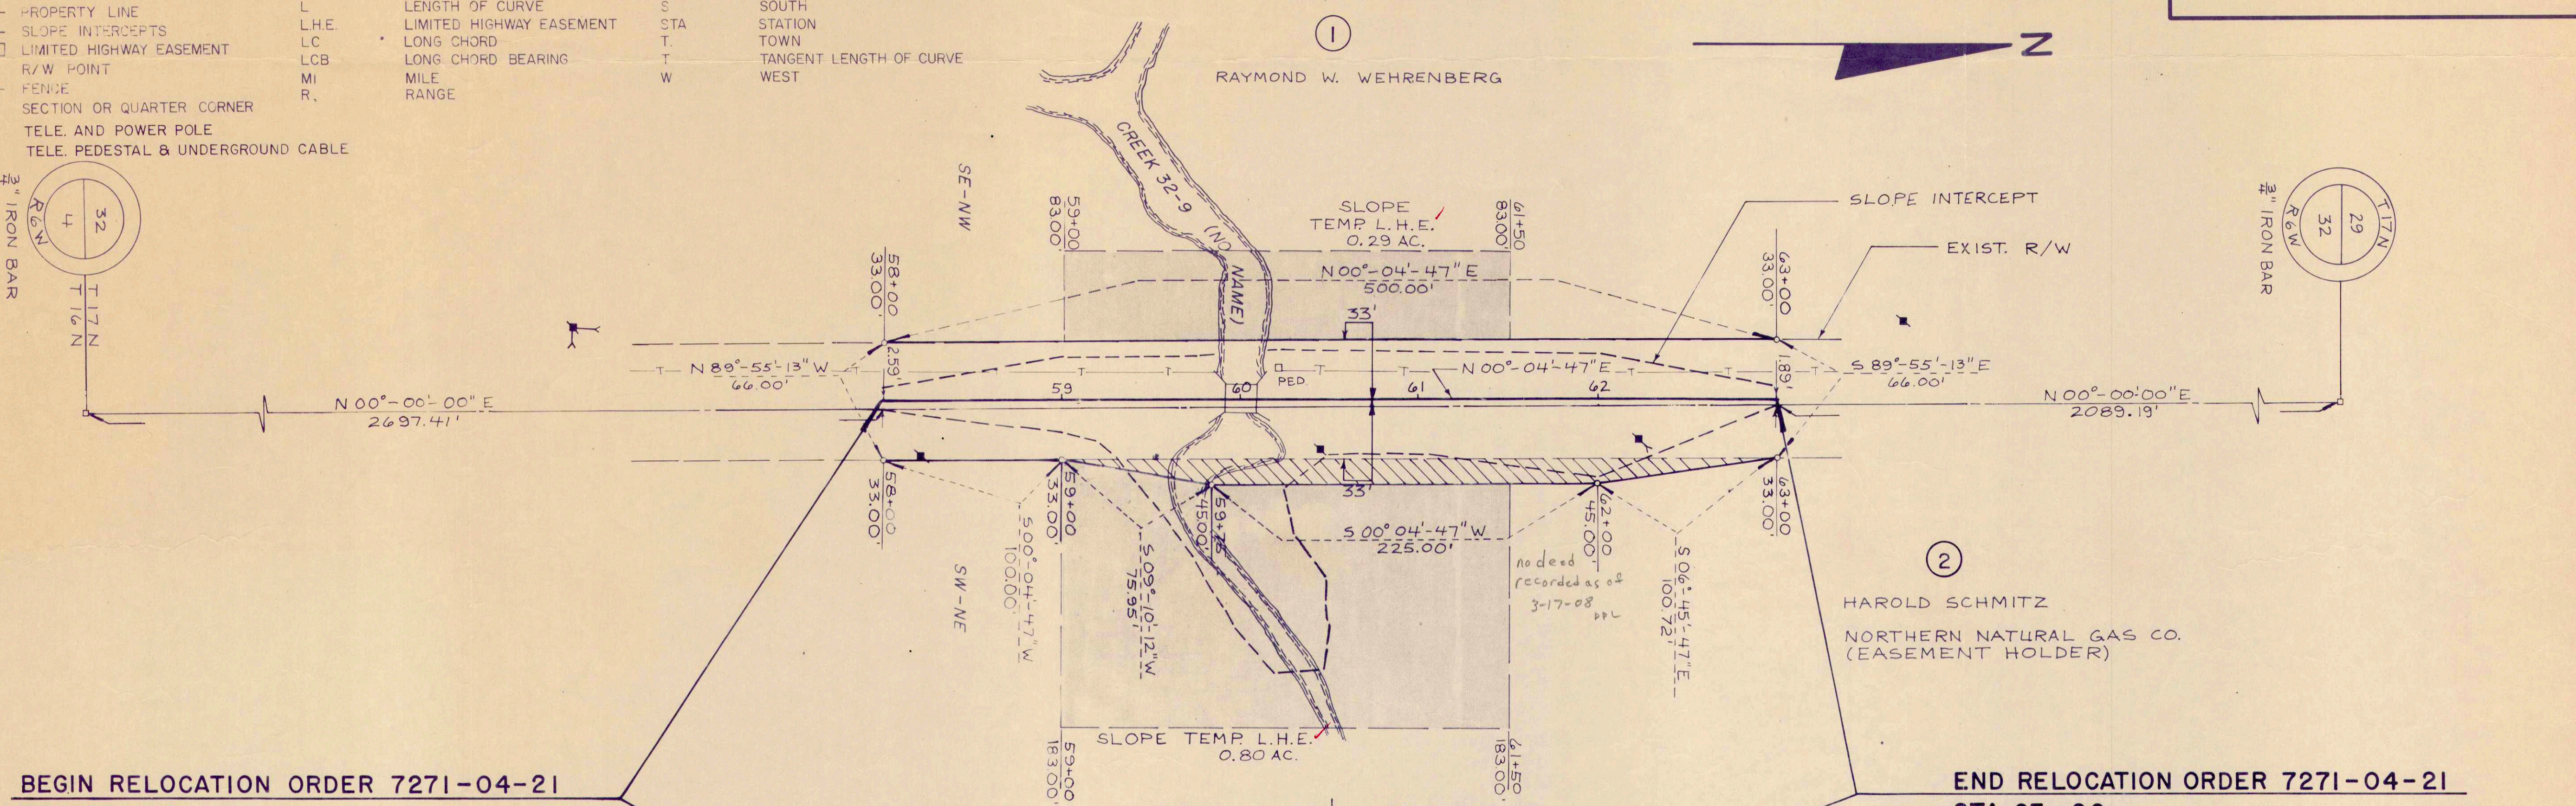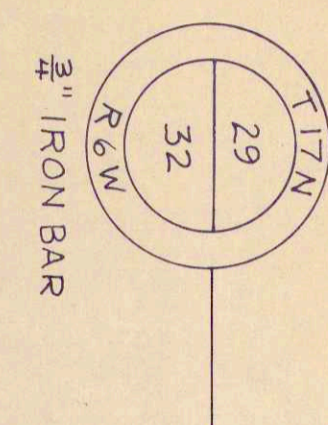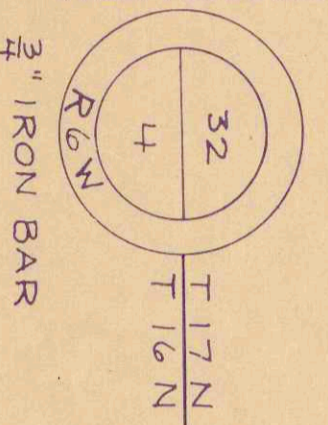

BEGIN RELOCATION ORDER 7271-04-21
STA 58+00
 N - 696,900 (±200)
 E - 1,704,400 (±200)
 2697.41' N & 2.59' W OF S 1/4 CORNER OF SEC. 32, T.17N, R.6W

END RELOCATION ORDER 7271-04-21
STA 63+00
 N - 697,400 (±200)
 E - 1,704,400 (±200)
 2089.19' S & 1.89' W OF N 1/4 CORNER OF SEC. 32, T.17N, R.6W

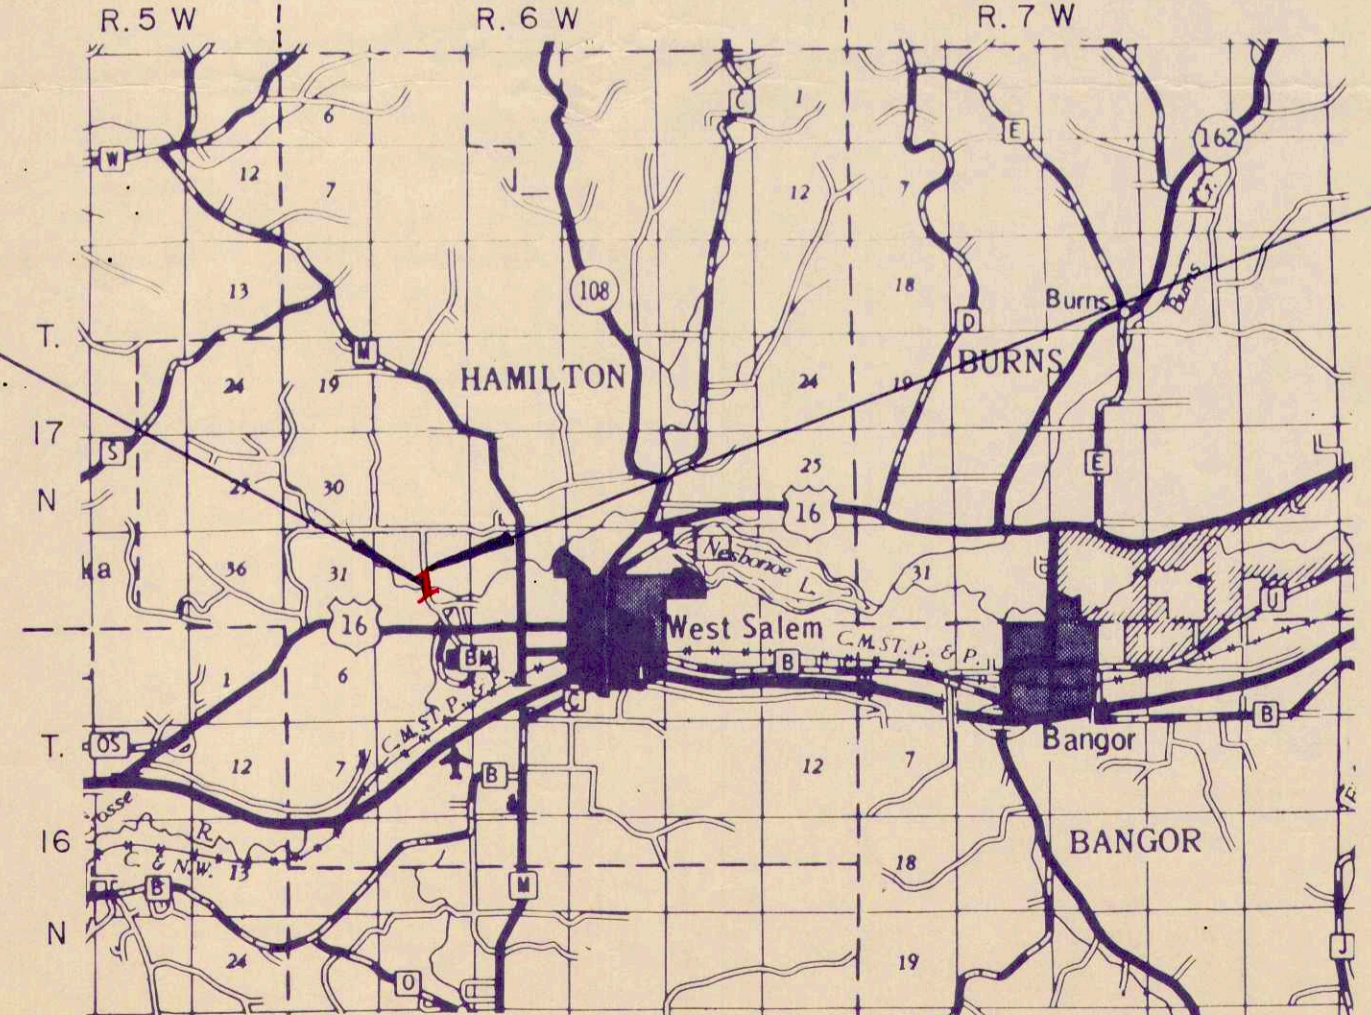

BEARING ORIENTATION
 RIGHT OF WAY PLAT BEARINGS ARE ORIENTATED TO THE MERIDIAN BETWEEN THE NORTH QUARTER CORNER OF SECTION 32, T.17N, R.6W, AND THE SOUTH QUARTER CORNER OF SECTION 32, T.17N, R.6W, WITH THE MERIDIAN BEARING ESTABLISHED AS S00°-00'-00"E. THE DIFFERENCE BETWEEN PLAT BEARINGS REPRESENTS PLANE ANGLES IN DEGREES, MINUTES, AND SECONDS.

LAYOUT SCALE 0 1mi. 2mi.
 TOTAL NET LENGTH OF CENTERLINE = 0.095 MI

NOTE: ALL COORDINATES SHOWN ON THIS PLAN ARE BASED ON THE WISCONSIN COORDINATE SYSTEM SOUTH ZONE AND ARE SCALED FROM U.S.G.S. TOPOGRAPHIC MAP, WEST SALEM, WISCONSIN QUADRANGLE, FOR IDENTIFICATION ONLY.

REVISION DATE
 APPROVED FOR TOWN OF HAMILTON BY
 10/13/80
 Date
 Martin J. Wehner
 Chairman